



TBi DA-2 Automatic wire cutter

- Reliable ignition due to precise stick-out
- Can be retrofitted to existing installations
- Designed for low maintenance

Advantages

- High cutting capacity
- Encapsulated unit, cut wire ends are collected in a drawer
- Very long life of the cutter blades

Ordering information

TBi DA-2


531P101058

Technical Data

TBi DA-2 Automatic wire cutter


| | |
|---------------------------|--|
| Function | Pneumatic cutting mechanism with electrical activation |
| Cutting power | up to 1.6 mm steel wire |
| Control | Connection to a potential-free contact or digital output |
| Signal voltage input | 24 V DC, max. 0.1 A |
| Compressed air connection | 5 - 6 bar, dry and oil-free |
| Dimensions (LxWxH) | 115 x 150 x 270 mm |
| Weight | approx. 4.8 kg |

Overview

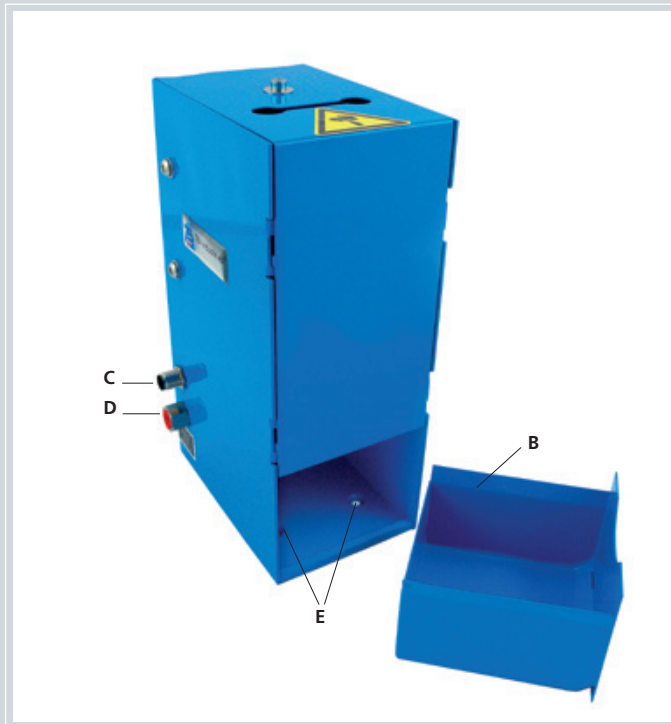

- A Cover for cutting mechanism, can be removed for maintenance
- B Container for cut wire ends
- C Connector for control cable (suitable plug included in delivery)
- D Compressed air connector (G ¼" female), max. 6 bar
- E Mounting holes

Accessories

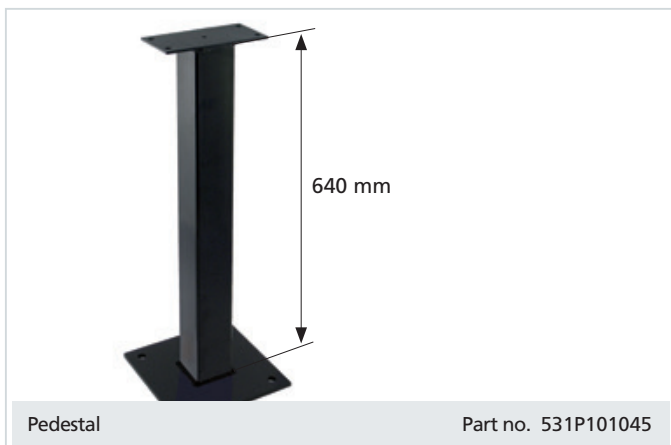

Pedestal

Part no. 531P101045