


Torches de soudage TIG

Modèles à lamelle

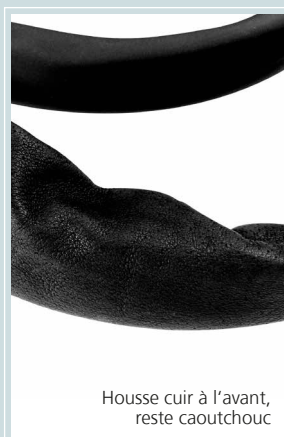

Refroidissement par air

	<p>TBi SR 9 (FX) LFR 35% (10 min.) AC: 80 A DC: 110 A Ø 0.5-1.6 mm</p>		<p>TBi SR 17 (FX) LFR 35% (10 min.) AC: 100 A DC: 140 A Ø 0.5-2.4 mm</p>		<p>TBi SR 26 (FX) LFR 35% (10 min.) AC: 140 A DC: 200 A Ø 0.5-4.0 mm</p>
<p>TBi SR 9 LFR 35/50 S, Ø 13 mm, M12x1</p>	<p>4 m 405PA17714 8 m 405PA17718</p>	<p>TBi SR 17 LFR 35/50 S, Ø 13 mm, M12x1</p>	<p>4 m 405PA17724 8 m 405PA17728</p>	<p>TBi SR 26 LFR 35/50 S, Ø 13 mm, M12x1</p>	<p>4 m 405PA17754 8 m 405PA17758</p>
<p>TBi SR 9 FX LFR 35/50 S, Ø 13 mm, M12x1</p>	<p>4 m 403PA17714 8 m 403PA17718</p>	<p>TBi SR 17 FX LFR 35/50 S, Ø 13 mm, M12x1</p>	<p>4 m 403PA17724 8 m 403PA17728</p>	<p>TBi SR 26 FX LFR 35/50 S, Ø 13 mm, M12x1</p>	<p>4 m 403PA17754 8 m 403PA17758</p>

Refroidissement par eau

	<p>TBi SR 18 (FX) LFR 100% (10 min.) AC: 225 A DC: 320 A Ø 0.5-4.0 mm</p>		<p>TBi SR 20 (FX) LFR 100% (10 min.) AC: 160 A DC: 220 A Ø 0.5-3.2 mm</p>		<p>TBi SR 21 (FX) LFR 100% (10 min.) AC: 240 A DC: 340 A Ø 0.5-3.2 mm</p>
<p>TBi SR 18 LFR 35/50, Ø 13 mm, M12x1</p>	<p>4 m 405PA17734 8 m 405PA17738</p>	<p>TBi SR 20 LFR 35/50, Ø 13 mm, M12x1</p>	<p>4 m 405PA17744 8 m 405PA17748</p>	<p>TBi SR 21 LFR 35/50, Ø 13 mm, M12x1</p>	<p>4 m 405PA17794 8 m 405PA17798</p>
<p>TBi SR 18 FX LFR 35/50, Ø 13 mm, M12x1</p>	<p>4 m 403PA17734 8 m 403PA17738</p>	<p>TBi SR 20 FX LFR 35/50, Ø 13 mm, M12x1</p>	<p>4 m 403PA17744 8 m 403PA17748</p>	<p>TBi SR 21 FX LFR 35/50, Ø 13 mm, M12x1</p>	<p>4 m 403PA17794 8 m 403PA17798</p>